

BTS 3ASI-200

CONTACT US NOW

(305) 319-0875

WWW.ASIGENERATOR.COM



ASI GENERATOR

**POWERING
YOUR NEEDS**



ASI GENERATOR

BTS 3ASI-200


Features

- MCCB type bilateral Transfer Switch
- Insolated manual tranfer handle for emergency switching
- Reliable motor-operated transfer mechanism
- Incorporate OCPD design
- DC - Outputs
- Mechanical interlock
- Complies with IEC60947-6-1 rquirements
- Optional service maintenance key lock device
- Quick connector for fast and easy installation
- MCCB has auxiliary limit switch inside
- PVC-coated bus bar insulation
- High short circuit breaking capacity

BTS Rated Operating Current & AC Rated Breaking Capacity

BTS Type	Poles	Rated Current (A) Ambient Temperature 40°C	AC Rated Breaking Capacity		
			Sym r.m.s (KA) IEC 60947-2 Icu / Ics		
			220V	380V	440V
ATS 3P 225A	3P	125.150.175.200.225	50/25	30/15	25/13

Mechanical Specifications

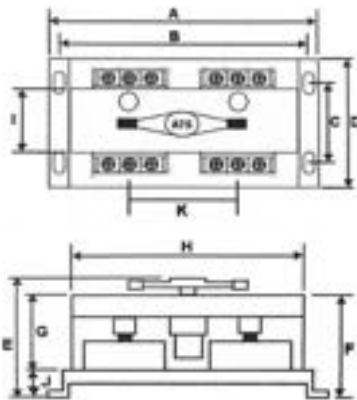

OCPD: Over current protection device.

IEC60947-6-1 Class CB:
ATS provided with over current releases and the main contacts of which are capable of making and are intended for breaking short circuit currents.

IEC60947-6-1 Utilization Category AC-33A:
Frequent operations.
Motor loads or mixed loads including motors, resistive loads and up to 30% incandescents lamp.

Customized BTS Available: Please provide the required specification and specified MCCB type (if there is any), we will evaluate the mechanical capability for customers.


	A	B	C	D	E	F	G	H	I	J	K	
3P 225A	495	465	185	220	216	180	135	364	125	44	225	Unit: mm
	19.49	18.31	7.28	8.66	8.5	7.09	5.31	14.33	4.92	1.73	8.86	Unit: inch

**POWERING
YOUR NEEDS**

WWW.ASIGENERATOR.COM



ASI GENERATOR

 (305) 319-0875
(786) 322-9752

 services@asigenerator.com
www.asigenerator.com

 1046 E 26th St,
Hialeah FL 33013