



BTS 3ASI-600

CONTACT US NOW
(305) 319-0875
WWW.ASIGENERATOR.COM



ASI GENERATOR

**POWERING
YOUR NEEDS**



ASI GENERATOR

BTS 3ASI-600


Features

- MCCB type bilateral Transfer Switch
- Insolated manual tranfer handle for emergency switching
- Reliable motor-operated transfer mechanism
- Incorporate OCPD design
- DC - Outputs
- ~~Mechanical~~ interlock
- Complies with IEC60947-6-1 rquirements
- Optional service maintenance key lock device
- Quick connector for fast and easy installation
- MCCB has auxiliary limit switch inside
- PVC-coated bus bar insulation
- High short circuit breaking capacity

BTS Rated Operating Current & AC Rated Breaking Capacity

	Poles	Rated Current (A) Ambient Temperature 40°C	AC Rated Breaking Capacity		
			Sym r.m.s (KA)	IEC 60947-2 Icu / Ics	
			220V	380V	440V
	3P	500, 600	50/25	30/15	22/11

Mechanical Specifications

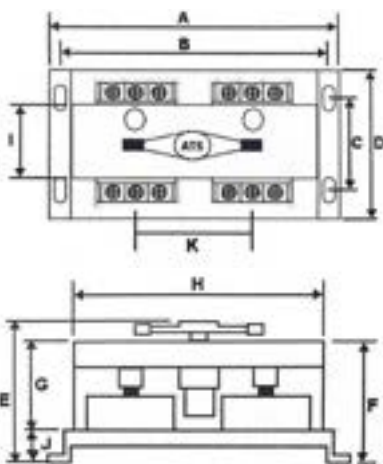

OCPD: Over current protection device.

IEC60947-6-1 Class CB:

ATS provided with over current releases and the main contacts of which are capable of making and are intended for breaking short circuit currents.

IEC60947-6-1 Utilization Category AC-33A:

Frequent operations.

Motor loads or mixed loads including motors, resistive loads and up to 30% incandescents lamp.

Customized BTS Available: Please provide the required specification and specified MCCB type (if there is any), we will evaluate the mechanical capability for customers.


	A	B	C	D	E	F	G	H	I	J	K	
3P 600A	785	743	195	284	305	285	210	620	205	75	360	Unit: mm
	30.91	29.25	7.68	11.18	12.01	11.22	8.27	24.41	8.07	2.95	14.17	Unit: inch

**POWERING
YOUR NEEDS**

WWW.ASIGENERATOR.COM



ASI GENERATOR

 (305) 319-0875
(786) 322-9752

 services@asigenerator.com
www.asigenerator.com

 1046 E 26th St,
Hialeah FL 33013